

FORM PTO-1390 (REV 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEYS DOCKET NO. 1037BP-1	
INTERNATIONAL APPLICATION NO. PCT/AU99/00917		INTERNATIONAL FILING DATE 22 October 1999	
TITLE OF INVENTION "BIO-OXIDATION PROCESS AND APPARATUS"		U.S. APPLICATION NO. (If known, see 35 CFR 1.5) 09/831579	
APPLICANT(S) FOR DO/EO/US RHODES, Mike; MILLER, Paul Charles; and WINBY, Richard		PRIORITY DATE CLAIMED 18 November 1998	

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. To 16. below concern documents or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.23 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ Other items or information:

"EXPRESS MAIL" MAILING LABEL NUMBER: EL545147530US
 DATE OF DEPOSIT: May 11, 2001

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, BOX PCT, WASHINGTON, D.C. 20231.

TYPED OR PRINTED NAME: JANICE MESSER

SIGNATURE: 

U.S. APPLICATION NO. (if known) 09/831579		INTERNATIONAL APPLICATION NO. PCT/AU99/00917		ATTORNEY DOCKET NUMBER 1037BP-1	
--	--	---	--	------------------------------------	--

17. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EPO or JPO	\$860.00
International preliminary examination fee paid to USPTO (37 CFR 1.482)	\$690.00
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))	\$710.00
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid USPTO	\$1,000.00
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)	\$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$	1,000.00	
---	----	----------	--

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	15 - 20 =	0	x \$18.00	\$	0.00
Independent Claims	2 - 3 =	0	x \$80.00	\$	0.00
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	1,000.00

Reduction of ½ for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37i CFR 1.9, 1.27, 1.28).

SUBTOTAL =

Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).	\$	+	
--	----	---	--

TOTAL NATIONAL FEE =

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property	\$	+	
---	----	---	--

TOTAL FEES ENCLOSED =

	\$	1,000.00	
--	----	----------	--

	Amount to be:	\$	
	refunded		
	charged	\$	

a. ☒ A check in the amount of \$_____ to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-1970. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 cfr 1.494 or 1.495 has not been met, a petition to revive (37 cfr 1.137(a) or (b)) must be filed and granted to restore the application pending status.

SEND ALL CORRESPONDENCE TO:

SHERIDAN ROSS P.C.
1560 Broadway, Suite 1200
Denver, Colorado 80202-5141
Telephone: (303) 863-9700
Facsimile: (303) 863-0223



 SIGNATURE

Robert D. Traver
Registration No. 47,999

09/831,579 1037BP-1

JG05 Rec'd PCT/PTO 1 8 MAR 2002

PATENT APPLICATIONS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:

RHODES et al.

Int'l. Serial No.: PCT/AU99/00917

Int'l. Filing Date: 22 October 1999

Priority Date: 18 November 1998

U.S. Serial No. 09/831,579

For: "BIO-OXIDATION PROCESS AND APPARATUS"

Atty. File No.: 1037BP-1

SECOND PRELIMINARY AMENDMENT

"EXPRESS MAIL" MAILING LABEL NO: EV068097118US
DATE OF DEPOSIT: 3-18-02

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

TYPED OR PRINTED NAME: JANICE MESSER

SIGNATURE: *Janice Messer*

Box PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Applicant believes no fees are due for this Preliminary Amendment. In the event fees are due, please charge the appropriate fee to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

IN THE SPECIFICATION:

Please amend the specification at page 1 following the title to include the following paragraph:

-- This application claims the benefits under 35 U.S.C. § 365 of PCT International Application No. PCT/AU99/00917 filed 22 October 1999 entitled "Bio-Oxidation Process and Apparatus" which was published in English on 25 May 2000 having International Publication Number WO 00/29629, and which claims priority to Australian Patent No. AU PP 7180 filed 18 November 1998. --

REMARKS

The above amendments are being submitted in connection with the national stage filing of the present Application.

Respectfully submitted,

SHERIDAN ROSS P.C.

By: Robert D. Traver
Robert D. Traver
Registration No. 47,999
1560 Broadway, Suite 1200
Denver, Colorado 80202-5141
(303) 863-9700

Date: 18 MARCH 2002

09/831579

09/831579

JC08 Rec'd PCT/PTO 11 MAY 2007

PATENT APPLICATIONS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:

RHODES et al.

Int'l. Serial No.: PCT/AU99/00917

Int'l. Filing Date; 22 October 1999

Priority Date: 18 November 1998

For: "BIO-OXIDATION PROCESS AND
APPARATUS"

Atty. File No.: 1037BP-1

Box PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

"EXPRESS MAIL" MAILING LABEL NUMBER: EL545147530US
DATE OF DEPOSIT: 5-11-01

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE
"EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE
UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND
IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR
PATENTS, BOX PCT, WASHINGTON, D.C. 20231.

TYPED OR PRINTED NAME: JANICE MESSER

SIGNATURE: 

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Fees for this Preliminary Amendment are calculated and included with the Transmittal Letter accompanying this Amendment. Please charge any underpayment or debit any overpayment to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

IN THE CLAIMS:

Please delete Claim 8.

Please amend Claims 1-7 and 9-16 as follows:

1. A process for recovering metals from materials containing them by bio-oxidation comprising;
 - a) treating, in a non-mechanically agitated reactor, a slurry comprising a metal containing material with bacteria capable of promoting extraction of metals from said metal containing material; and,

Application No.: PCT/AU99/00917

- b) introducing an oxygen-containing gas to the slurry within the reactor by aeration means.
2. The process of Claim 1, wherein said oxygen-containing gas is introduced to said slurry in bubbles of controlled size.
3. The process of Claim 2, wherein said aeration means includes at least one diffuser selected from the group consisting of tubular, dome-shaped, doughnut shaped and disc shaped diffusers.
4. The process of Claim 1, wherein said reactor is rakeless.
5. The process of Claim 1, wherein gas introduced to the reactor further includes carbon dioxide.
6. The process of Claim 1, wherein said bacterial culture includes at least one microorganism selected from the group consisting of *Thiobacillus ferrooxidans*, and *Thiobacillus thiooxidans*, *Leptospirillum ferrooxidans*, *Sulphobacillus thermooxidans*, *Sulpholobus brierleyi*, *Sulpholobus BC* and *Sulpholobus acidocaldarius*.
7. The process of Claim 1, wherein said metal containing material contains at least one metal selected from the group consisting of non-ferrous base metals, precious metals and rare earth metals.
9. A reactor system for bio-oxidation treatment of metal containing materials comprising at least one rakeless reactor having a reactor volume provided with aeration means for introducing an oxygen containing gas to the reactor volume for maintaining said metal containing material in suspension and bacterial viability.
10. The reactor system of Claim 9, wherein said at least one reactor is a tank or vat.
11. The reactor system of Claim 10, wherein said at least one reactor includes a reservoir lined with a liquid impermeable barrier.
12. The reactor system of Claim 10, wherein said at least one reactor has a feed end and a discharge end with a base of the reactor having a descending slope towards the discharge end.

Application No.: PCT/AU99/00917

13. The reactor system of Claim 9, wherein said aeration means includes at least one diffuser.
14. The reactor system of Claim 13, wherein each diffuser is placed adjacent the base of the reactor.
15. The reactor system of Claim 13, wherein said diffuser is selected from the group consisting of a tubular, dome shaped, doughnut shaped and disc diffuser.
16. The reactor system of Claim 9, wherein said aeration means is located in a pipeline communicating with said at least one reactor.

REMARKS/ARGUMENTS

The above amendments are being submitted in connection with the national stage filing of the present Application. The amendments eliminate the multiple dependent claims from the Application and place the claims in a format believed to be acceptable to the U.S. Patent Examiner. None of the amendments made, nor cancellation of claims is intended to be, nor shall properly be construed as, a narrowing of the present invention.

No new matter has been added by the above amendments to the specification.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Version With Markings to Show Changes Made."**

Respectfully submitted,

SHERIDAN ROSS P.C.

By: Robert D. Traver
 Robert D. Traver
 Registration No. 47,999
 1560 Broadway, Suite 1200
 Denver, Colorado 80202-5141
 (303) 863-9700

Date: 11 May 2001

Application No.: PCT/AU99/00917

13. The reactor system of Claim 9, wherein said aeration means includes at least one diffuser.

14. The reactor system of Claim 13, wherein each diffuser is placed adjacent the base of the reactor.

15. The reactor system of Claim 13, wherein said diffuser is selected from the group consisting of a tubular, dome shaped, doughnut shaped and disc diffuser.

16. The reactor system of Claim 9, wherein said aeration means is located in a pipeline communicating with said at least one reactor.

REMARKS/ARGUMENTS

The above amendments are being submitted in connection with the national stage filing of the present Application. The amendments eliminate the multiple dependent claims from the Application and place the claims in a format believed to be acceptable to the U.S. Patent Examiner. None of the amendments made, nor cancellation of claims is intended to be, nor shall properly be construed as, a narrowing of the present invention.

No new matter has been added by the above amendments to the specification.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Version With Markings to Show Changes Made."**

Respectfully submitted,

SHERIDAN ROSS P.C.

By: Robert D. Traver
Robert D. Traver
Registration No. P-47,999
1560 Broadway, Suite 1200
Denver, Colorado 80202-5141
(303) 863-9700

Date: 11 May 2001

Application No.: PCT/AU99/00917

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Claims:

Claim 8 has been canceled.

Claims 1-7 and 9-16 have been amended as follows:

1. A process for recovering metals from materials containing them by bio-oxidation including comprising:
 - a) treating, in a non-mechanically agitated reactor, a slurry containing comprising a metal containing material with bacteria capable of promoting extraction of metals from said metal containing material; and maintaining said material in suspension and bacterial viability in the reactor by;
 - b) introducing an oxygen-containing gas to the slurry within the reactor by aeration means.
2. The process of cClaim 1, wherein said oxygen-containing gas is introduced to said slurry in bubbles of controlled size.
3. The process of cClaim 2, wherein said aeration means includes at least one diffuser selected from the group consisting of tubular, dome-shaped, doughnut shaped and disc shaped diffusers.
4. The process of ~~any one of the preceding cClaims~~ 1, wherein said reactor is rakeless.
5. The process of ~~any one of the preceding cClaims~~ 1, wherein gas introduced to the reactor further includes carbon dioxide.
6. The process of ~~any one of the preceding cClaims~~ 1, wherein said bacterial culture includes at least one microorganism selected from the group consisting of *Thiobacillus ferrooxidans*, and *Thiobacillus thiooxidans*, *Leptospirillum ferrooxidans*, *Sulphobacillus thermooxidans*, *Sulpholobus brierleyi*, *Sulpholobus BC* and *Sulpholobus acidocaldarius*.
7. The process of ~~any one of the preceding cClaims~~ 1, wherein said metal containing material contains at least one metal ~~of selected from~~ the group consisting of non-ferrous base metals, precious metals and rare ~~earths~~: earth metals.
9. A reactor system for bio-oxidation treatment of metal containing materials including comprising at least one rakeless reactor having a reactor volume provided with aeration means for introducing an oxygen containing gas to the reactor volume for maintaining said metal containing material in suspension and bacterial viability.

BIO-OXIDATION PROCESS AND APPARATUS**FIELD OF THE INVENTION**

This invention relates to bio-oxidation processes and reactors for the liberation of metals from minerals, especially sulphides, containing them.

5 BACKGROUND OF THE INVENTION

Metal containing minerals, especially metal sulphides, may be oxidised using specific types of micro-organism, especially bacteria in a bioextraction, particularly a bio-oxidation process. Oxidation of sulphide minerals may be used to put the metals into solution, from for example iron, copper, zinc, nickel and
10 cobalt sulphides, or to release precious metals, such as gold, silver and platinum, encapsulated in metal sulphides, particularly in refractory ores. The process is known as bacterial oxidation, bioextraction, bio-oxidation, bioleaching, or bacterial leaching. In this respect, pyrite, an iron sulphide, and arsenopyrite, an iron-arsenic sulphide are the most common minerals occluding gold in the so-called
15 refractory gold ores and treatment of such materials by microorganisms may therefore assist in liberation of precious metals from refractory ores containing them.

Certain kinds of bacteria used in such processes have been documented and include the mesophiles, *Thiobacillus ferrooxidans*, *Thiobacillus thiooxidans*,
20 *Leptospirillum ferrooxidans*, moderate thermophiles, and thermophiles such as *Sulpholobus*.

The above processes are the subject of an extensive literature encompassing papers and patents. However, conventional methods of bacterial oxidation involve oxidation in agitated stirred tanks into which air is introduced or
25 in heaps using rocks with a size of 6mm or greater in which fine particles may have been agglomerated or heaps using pelletised fine material. An acidic bacteria containing liquor is developed and typically used to irrigate the heap and facilitate metal extraction. The heap leaching technique has been used for many years and Brierley et al have patented a process (US Patent No. 5246486) for a
30 two stage agglomeration process for the recovery of gold from sulphide minerals in heaps where the mineral particles are of large size and not slurried.

Van Aswegen in the article "The Genmin Experience", has described bacterial oxidation in tanks made of stainless steel or other lined steel which contain a slurry of concentrate and water. The tanks are typically 9 metres high

and 9 metres diameter and agitated with axial flow impellers which are driven by large motors. Compressed air is piped into the tank and sheared by the impellers into a fine dispersion of bubbles to maintain a desired dissolved oxygen concentration in the slurry. A variety of impeller types other than axial flow may
5 be used such as turbines.

The present applicant has found that such methods suffer from a number of disadvantages. Primary among these is the high power consumption and high capital cost encountered in employing bacterial oxidation reactors agitated by impellers.

10 Although proposals have been made to employ diffusion means to maintain particles in suspension, notably in Envirotech US Patent Nos. 4728082, 4732608, 4968008, 4974816 and 5007620, it is uniformly recognised that there is a need to provide some mechanical means, for example in the form of a rake to ensure that significant quantities of solids are not deposited on the floor of the reactor vessel,
15 reducing reactor efficiency.

SUMMARY OF THE INVENTION

It is the object of the present invention to provide an improved process and apparatus for carrying out bacterial oxidation especially of metal sulphide minerals.

20 With this object in view, the present invention provides, in its first aspect, a process for recovering metals from materials containing them by bio-oxidation including treating, in a non-mechanically agitated reactor, a slurry containing a metal containing material with bacteria capable of promoting extraction of metals from said metal containing material; and maintaining said material in suspension
25 and bacterial viability in the reactor by introducing an oxygen-containing gas to the slurry within the reactor by aeration means.

The aeration means advantageously introduces gases to the reactor in the form of bubbles of controlled size, generally of small diameter to enhance mass transfer of oxygen to bacteria. It will be understood, in this respect, that the
30 bacterial oxygen demand is extremely high and oxygen diffusion characteristics important. Control of bubble size by shearing is not employed.

Suitable aeration/agitation means may particularly and advantageously include diffusers as described hereinbelow. Diffusers are devices that will both introduce air or other gases to the slurry by diffusion mass transfer of gas from

fine bubbles- advantageously of controlled size-to the solution or slurry and maintain solids in suspension for bacterial oxidation. Dome, tubular, disc or doughnut type diffusers may appropriately be used in accordance with the invention.

5 Aeration means may include hydraulic shear devices. In such devices, very fine bubbles are formed by dislodgment thereof before full development under the influence of shear forces.

Surface aerators such as paddle aerators may be used to break liquid surface and assist in entrainment of gas such as air in the bulk reaction slurry.

10 Reactor configuration may be varied to maximise aeration.

A further alternative would be the use of liquid jets where a stream of liquid from a reactor is pumped through a venturi which draws air into the liquid thereby aerating it. The aerated liquid is returned to the reactor.

In a particularly preferred embodiment, a gas appropriate for maintenance of bacterial viability include oxygen containing gases, such as air, oxygen enriched air or oxygen; optionally, with addition of carbon dioxide, such as air enriched with carbon dioxide, may be introduced to the aqueous solution by aeration means, particularly diffusers.

Where a bio-oxidation process is involved, various chemolithotrophic bacteria
20 may be employed. Various categories of bacteria may be employed in these
processes. These categories are as follows:

- 1) mesophiles which are suitable for oxidation in the range 10°C to 45°C
- 2) moderate thermophiles, which oxidise the sulphide minerals in the range 40°C to 60°C; and
- 3) thermophiles which oxidise from above 50°C to 90°C.

The process may be carried out employing any one or more such microorganisms, especially bacterial species, often referred to as a single or mixed culture respectively, which will oxidise sulphides or other minerals or metal containing materials in the required temperature range. Preferred mesophiles for use in bacterial oxidation are *Thiobacillus ferrooxidans*, *Thiobacillus thiooxidans* and *Leptospirillum ferrooxidans*. Most of the moderate thermophiles do not have specific names, but some have been referred to as *Sulphobacillus thermooxidans*. Preferably, the thermophilic bacteria will be of the type

Sulpholobus brierleyi, *Sulpholobus BC*, and *Sulpholobus acidocaldarius*. Notwithstanding naming of species herein, similar iron and sulphur oxidising bacteria within the overall temperature range of 0°C to 90°C identified but not yet named are included within the scope of the present invention. The process is
5 most advantageously conducted generally in the temperature ranges for which the bacteria are tolerant as described above. Reaction may be undertaken in the mesophilic, moderately thermophilic or extreme thermophilic temperature range.

Though the process may be employed exclusively for metal liberation, pre- or post- treatment by other metallurgical operations, such as CIP or CIL
10 processes for recovery of precious metals for example, may be employed where desirable. Solid/liquid separation may typically follow bio-oxidation, liquor being further treated for metal recovery.

The process may be conducted in any suitable reactor, including those types of reactor already generally known to the art, operating advantageously on
15 a continuous basis. Aeration may be achieved by including, in such reactors, suitable aeration means even in large capacity systems.

However, it is intended that no mechanical means be employed within the reactor, that the introduction of gas be employed as the sole agency by which particles are maintained in suspension without significant build-up of mineral
20 containing particles constituting the metal containing material on the floor of the reactor. Such a reactor may be said to be rakeless.

In a particularly preferred embodiment, the metal containing material is, for example, a non-ferrous base metal sulphide ore, such as a copper, nickel, zinc, lead or cobalt containing ore, including mixed or polymetallic ores, or a refractory
25 gold ore incorporating occluding sulphides amenable to dissolution by bacterial action. Other materials in this class may include flotation concentrates, gravity concentrates, tailings, precipitates, mattes and sulphidic fume. However, the above process is also suitable for carrying out bacterial oxidation and bioleaching of non-sulphide ores and other generally inorganic materials containing metals in
30 economic concentrations, where suitable bacteria are available to carry out the process. For example, without intending to limit the invention in any way, bioleaching of rare earth ores, oxidic manganese ores and phosphate rock is possible in accordance with process of the invention.

In a further embodiment of the invention, there is provided a reactor

Aerating means, or diffusers, may be located at even spacings along the base of the reactor. A concentration of diffusers may be determined as a function of oxygen demand in the reactor.

Feed may be introduced at one end of the reactor through multiple points located along the width of one end. Distribution of slurry to these points may be via a ring main or splitter of conventional type.

However, it is not intended to restrict possible reactor designs to the above
5 configurations and other configurations could be employed.

BRIEF DESCRIPTION OF THE DRAWINGS

Description of preferred embodiments of the invention now follows. The description is made with reference to the accompanying drawings in which:

Figure 1 is a side sectional view of an aeration means to be used in
10 accordance with a first embodiment of the process of the present invention;

Figure 2 is a plan view of the aeration means shown in side section in Figure 1;

Figure 3 is a side sectional view of an aeration means to be used in accordance with a second embodiment of the process of the present invention;

15 Figure 4 is a plan view of the aeration means shown in side section in
Figure 3;

Figure 5 is a schematic diagram showing flow circulation in a reactor, including a tubular aeration means, as operated in accordance with a third embodiment of the process of the present invention;

20 Figure 6 is a schematic diagram showing flow circulation in a reactor including disc aeration means, as operated in accordance with a fourth embodiment of the process of the present invention.

Figure 7 is a side schematic diagram showing another embodiment of a reactor according to the present invention; and

25 Figure 8 is a plan schematic diagram for the reactor of Figure 7.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring specifically to the Figures 1 to 4, the gas is delivered through diffusers, i.e. a means for diffusing a gas into the liquid portion of a slurry or solution. Typically, compressed air - though other gases as described above may be suitable - is blown through gas supply line 10 to the diffuser unit 1 passing through a perforated wall 11 thereof forming air bubbles which serve to transfer oxygen and carbon dioxide into a slurry 2 in a reactor (not shown) for bacterial respiration and for oxidation of minerals. Gas supply line 10 may service a number of reactors. A slug flow introduction of air or gas to the reactor, that is,

without control over bubble size at introduction to the reactor, is not desirable and is, most advantageously, to be avoided.

Diameter or size of the perforations 13 in wall 11 dictates bubble size, as desired, in a controlled manner. The smaller the bubble size the greater the surface area per unit of volume providing efficiency of gas-liquid contact allowing the high values of oxygen transfer that are necessary for efficient bacterial oxidation. Bubble size is to be maintained at 7.5mm average diameter or less, preferably 5mm average diameter or less.

Disc, doughnut or tubular designs may be employed, the first two types being shown in Figures 1 to 4.

A disc diffuser, as seen in side section in Figure 1 and plan in Figure 2, is manufactured from a flexible membrane 15 that closes when no air is being delivered. This ensures that substantially no slurry enters gas supply line 10 during processing. The membrane 15 may be retained in position by a retaining device such as a clamping ring 16 which fixes the membrane in position 15 about an outlet 20 of the gas supply line 10. As the membrane 15 expands with air flow, perforations in the form of pores in the membrane open allowing air flow therethrough. The pores 13 may advantageously be microscopic, of the order of 1 to 5 μ in diameter. As a result, impeller action is not required to shear air slugs to an appropriate bubble size distribution to optimum transfer of oxygen to the slurry. Further the mass transfer occurs in a readily controllable fashion and the bubble size may be controlled by selecting a membrane or other material (see below) with desired pore or hole size.

A doughnut shaped diffuser is shown in side section in Figure 3 and plan in Figure 4. Again, a membrane 15 is employed which has the same characteristics as discussed above. However, here the gas supply line 10 serves further supply lines 23 feeding the doughnut shaped tube 24, the walls of which are formed from membrane 15 thereby providing greater contact area of membrane 15 with solution or slurry.

Characteristics of membrane 15 may include flexibility, relatively low cost, durability and easy replacement. The membrane 15 may be formed from acid resistant rubber or other polymers with a pore size distribution as desired for use in the process. The membrane may be manufactured in a known manner in the field of membrane technology.

A further type of diffuser is of typically dome shape and manufactured from plastics or ceramics. The material is perforated with holes of similar diameter to that above that are fixed and open all the time allowing air to flow therethrough to form a bubble swarm in the slurry within the reactor.

5 A particularly effective type of diffuser is tubular with the tubular body perforated with holes for gas exit preferably having a U-shaped configuration. The tubular body may be connected to the gas supply line and may be formed from a membrane or suitable plastic or ceramic material.

Diffusers suitable for the application will typically be sized to allow a sufficient
10 volume of gas to be diffused into the slurry to achieve between 0.5 and 15 mg/l dissolved oxygen concentration in the slurry depending upon the oxygen requirement of the bacteria used in the bio-oxidation process. There may be provided a number of diffusers as necessary to maintain solids in suspension and supply sufficient gas for oxidation.

15 Reactor configuration may be selected to achieve optimal aeration. Diffuser(s) 24 may be placed adjacent, that is at, or just off, the base of the reactor, if applicable, spaced at intervals - possibly with different rates of gas introduction - to give a suitable bubble distribution for the material being treated. The diffusers are fixed in position. Under different circumstances, the number of
20 diffusers required to maintain the solids in suspension may be greater than that required for oxidation, at other times the number required may be lower. A uniform arrangement throughout the reactor base may be preferred. Conveniently, the number of aeration means or diffusers per unit area within the reactor may vary such that there is a greater proportion at the feed end of the
25 reactor where higher rates of bacterial oxidation would be expected than at the discharge end.

Figures 5 and 6 show, without intending to limit the invention, likely flow circulation patterns for a number of tubular and disc diffusers located in a reactor
100. It may be understood that each arrangement allows efficient mixing and
30 bacterial/solid contacting though a disc diffuser arrangement may be preferred.

Figures 7 and 8 show a reactor 200 of rectangular plan having a sloped base 204. The gradient of base 204 descends from feed end 208 (to which input slurry is introduced) to discharge end 212 (at which the output leached particles are removed). An overflow liquor stream 218 is removed to a metal recovery

stage (not shown).

A number of diffusers 224 of tubular type are located evenly spaced along the base of the reactor 200.

Diffusers 224 are supplied with air by line 232 air is induced to flow through line 232 by induction fan 230. Carbon dioxide supplement is introduced by line 226 to line 232. Suitable diffusers 224 are of tubular fine bubble membrane type available in Australia from MRE, Adelaide, the distributor of Enviroquip ® tubular diffusers. Such diffusers are particularly suitable for attachment to PVC pipe which may be conveniently used for line 232.

The tubular diffusers 224 are supplied with oxygen containing gas by a main pipe or manifold 225 of which the tubular diffusers 224 form lateral extensions covering the base of the reactor 200 as shown in Figure 8. As the core of each diffuser 224 fills with water they will stay on the base of the reactor 200.

Diffusers may also be provided in pipelines communicating with a reactor, for example those connecting the reactor with others in the reactor system. Alternatively, gas may be introduced at these points by other suitable means. This may be especially applicable in the case of a heap or dump leaching process in which ore particles are not placed into suspension in the leach liquor.

Materials treated by the process and reactor systems of the invention may include ores, concentrates obtained from ores, tailings, wastes and other materials having sufficient metal values present to economically remove the metal or to remove metals detrimental to the environment or other processes. It is to be understood that the present invention is not limited to the treatment of sulphides.

The metal value containing material may require to be pre-treated, for example crushed, to a size sufficiently small to enable it to be ground in conventional comminution equipment such as ball mills.

Conveniently, the solids requiring oxidation are ground to a particle size sufficiently fine for the gas to be effectively used in maintaining a suspension thereof and without allowing significant build-up on the floor of the reactor. Typically, grinding to a suitable particle size distribution is necessary to meet this criterion. The size of the product after grinding is preferably 90% passing 50 microns or less. It is advantageous for the ore or other metal containing material to be ground in an ultra fine grinding machine to particle size between 80%

5

10

15

30

Conveniently, the bacterial oxidation process is carried out in an acidic solution which is suitable for growth of the specific bacteria, for example thiobacilli, used. This is expected to be in the range of 0.5 to 3.0. Preferably, the

pH will be in the range 0.8 to 2.5. An initial acid addition may be required at the start of the process to neutralise acid consuming minerals and maintain the pH in the required range. The process of oxidising sulphide minerals produces acidic by-products and it is likely that the pH will decrease during processing. If
5 necessary, the pH may be maintained in the required range by controlled addition of a base or basic agent such as lime, limestone or any other suitable alkali.

Where the material to be treated is not a sulphide, reaction may be carried out under alkaline conditions. In these situations the pH is to be kept at a level suitable to the specific leaching conditions.

10 Support of the bacteria is likely to require the addition of nutrients to maintain growth. Typical nutrients to be introduced to the reaction zone are nitrogen, sulphur and phosphorus containing materials such as ammonium sulphate, potassium dithiophosphate and magnesium sulphate. In addition, other nutrients may be required for specific ores and concentrates as is known in the
15 art.

Further, as oxidation of sulphide minerals is an exothermic process, heat will be released during bacterial oxidation. This may be a problem where ores are treated but may be especially true where an enriched sulphide concentrate is treated. In this case, the release of heat may increase the temperature of the
20 slurry in the reactor above that tolerated by the bacteria, especially thiobacilli. *Sulpholobus* bacteria are more temperature tolerant. Therefore, the reactors are typically to be provided with cooling systems. Water may be a suitable coolant and the cooling system may be direct, with coolant water introduced at the base of the reactor. Alternatively, indirect cooling may be employed using conventional
25 heat exchanger technology. For example, a cooling tower could produce cold water which feeds cooling coils, tube bundles or like means suitably located in the reactor. Tube bundles and coils may be preferred in the absence of strong currents generated by stirring or agitation by turbine blades. Evaporative cooling may be promoted by reducing depth of a reservoir and increasing the surface
30 area. The coolant may be introduced at sufficient velocity to assist in maintaining solids in suspension and admitted water may counteract evaporation losses.

More generally, a temperature control system with heating/cooling functions may be employed. The location and nature of temperature control system, internal or external, direct or indirect, may be varied to achieve the

required temperature control of the reactor. For example, when thermophilic bacteria are used, heating to above 60°C may be required.

Other uses of the process may be exemplified, without limitation, as follows:

5 FERRIC ION GENERATION

The process of the invention is suitable for converting ferrous ions in solution to ferric ions which may attack minerals, for example uranium minerals, to liberate metal values of economic interest.

TREATMENT OF MANGANESE CONTAINING ORES

10 Manganese ores may be treated by mixing with a metal sulphide with the
parameters for bacterial oxidation being as above described.

Alternatively, manganese ores may be bioleached with the organism *Enterobacter* at pH controlled between 4 and 8.

SULPHUR REMOVAL FROM COAL

15 . The mineral pyrite occurs with coal and bacterial oxidation using chemolithotrophic bacteria has been used to remove pyrite and reduce sulphur content. The process of the invention may be employed for sulphur removal with the parameters for bacterial oxidation being as above described.

In accordance with the process and reactor systems of the invention the
20 grade of ore, concentrate or other metal containing material may be lower than
that for agitated tanks and like reactor systems because of expected lower capital
and operating costs.

The invention will be more fully understood from the description of the following examples.

25

Example A	Inert Material
-----------	----------------

A trial was conducted on an inert mineral used to duplicate sulphide ores and concentrates.

30 A 10% weight percent slurry with a sizing of 90% passing 16 micrometers was maintained in uniform suspension in a tank with fine air bubbles injected from a close packed array of membrane disc diffusers of EPDM synthetic rubber commercially available from Nopol's under the trade mark PIK300. The diameter of the disc is 304 millimetres at the base of a 1.4 metre diameter by 4 metre high

tank. The height of tank is similar to that used in commercial practice.

Air flows of at least 2.4 Nm³/h/diffuser was required to prevent settling of solids. The air flow rates required were within the manufacturer's recommended operating range.

5 Solids that settled because of a reduction or disruption in air flow were re-suspended when the air flow was re-established at 2.4 Nm³/h/diffuser or higher.

These results showed that a typical ground sulphide concentrate with a sizing of 90% passing 12 micrometres would stay in suspension under the same operating conditions.

10 The operating conditions with respect to air flow were set to duplicate an oxygen demand of 1.5 kilograms per cubic metre hour which is equivalent to that required for bacterial oxidation of sulphide minerals.

Example B Leaching of Refractory Gold Sulphide Concentrate

15

A sample of gold concentrate containing arsenopyrite and pyrite was ground to a size such that 80% of the particles were less than 15 micrometers in diameter.

20 The bio-oxidation reactor, constructed from conventional acid resistant material, had a volume of 200 litres and was provided, at its base, with a membrane diffuser as described in Example A. Air was supplied to the diffuser at a rate which maintained the ground solids in suspension. No other agitation was used.

25 The ground concentrate was mixed with water to produce a slurry at 10% solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately five litres of an inoculum slurry containing a mixture of mineral concentrate and moderately thermophilic bacteria was added to the slurry in the reactor. Thereafter a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

30 The reactor was then heated such that the temperature of the slurry was maintained at 48°C, in the moderate thermophile range.

Air was added to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be

emitted from the diffuser. The air was used to maintain the particles in suspension and also to supply the oxygen requirement of the bacterial culture. No additional agitation of the reactor volume was employed. Samples of the slurry were taken on a daily basis to determine the extent of oxidation of the arsenopyrite/pyrite concentrate.

	Time (days)	Oxidation Level (%)	
		Arsenic	Iron
	6	100	na
10	32	100	94

The final residue in the tank was analysed after the test had proceeded for 32 days.

	Assay (wt%)		
	As	Fe	S ²⁻
Initial Concentrate	3.05	21.0	23.0
Final Residue	0.03	0.4	0.1
Oxidation (%)	99	96	99

S²⁻ is the amount of sulphide sulphur present and determines the amount of total oxidation that has occurred. Based on the analysis of the residue, the oxidation extent was determined.

Gold was then extracted from the residue using conventional cyanide leaching. The residue assayed 67 g/t gold of which 99% was extracted by cyanidation.

Example C Leaching of Copper Concentrate

A sample of copper concentrate containing chalcopyrite (and designated "CP1") was ground to a size such that 80% of the particles were less than 10 micrometers in diameter.

Again, the bio-oxidation reactor had a maximum volume of 200 litres and a

membrane diffuser, as described in Example A, was installed at the base. Air was supplied at a rate to maintain the ground solids in suspension and maintain oxygen requirement of the bacteria. No other agitation was employed.

The ground concentrate was mixed with water to produce a slurry at 5% solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately 5 litres of an inoculum slurry containing a mixture of mineral concentrate and moderately thermophilic bacteria was added to the slurry in the reactor. Thereafter, a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

The reactor was then placed in a heated room such that the temperature of the slurry was maintained at 48°C.

Air was introduced to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in suspension and provide the oxygen requirement of the bacteria. No additional agitation of the reactor was employed. Samples of the slurry were taken on a daily basis to determine the extent of oxidation of the arsenopyrite/pyrite concentrate.

Conditions		CP1
Copper Content (%)		18
25 Copper Extraction (%)	Acid Leach only	4
Copper Extraction (%)	Bacterial oxidation leach	
	using moderate thermophilic bacteria	84

Example D Polymetallic Concentrate

D.1 LEACHING WITH MESOPHILIC BACTERIA

In this example, the reactor used was 125mm diameter and 1.7m high. A diffuser, as described in Example A, was installed in the base of the reactor. A sample of mixed polymetallic concentrate (designated "M1") containing a mixture of mineral sulphides was bio-oxidised to extract zinc, nickel, copper and cobalt. The concentrate contained the nickel mineral pentlandite, as well as

nickel contained within the structure of the mineral pyrrhotite. Copper was predominately present in the form of chalcopyrite though chalcocite and bornite were also present. Zinc was present as sphalerite. The metal cobalt was associated with the nickel minerals and as the mineral cobalt. The concentrate
 5 was ground to a size such that 80% of the particles were less than 15 micrometers in diameter.

The ground concentrate was mixed with water to produce a slurry at 10% solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately half a litre of an inoculum slurry
 10 containing a mixture of mineral concentrate and mesophilic bacteria (*Thiobacillus ferrooxidans* and *Thiobacillus thiooxidans*) was added to the slurry in the reactor. Thereafter, a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

The reactor was then placed in a heated room such that the slurry
 15 temperature was maintained at 35°C.

Air was introduced to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in
 20 suspension and to supply the oxygen requirement of the bacteria. No additional agitation of the reactor was employed. The concentrate was oxidised with metals being released into solution. The level of extraction of the metals was determined by analysing a portion of the liquid fraction of the slurry. When the reaction was complete, the solid and the liquid phases were separated and the solution and the
 25 solids analysed.

	Conditions	M1
	Copper Content (%)	5.7
	Nickel Content (%)	0.9
30	Cobalt Content (%)	0.06
	Zinc Content (%)	0.21
	Sulphur Oxidation (%)	98

WO 00/29629	17	PCT/AU99/00917
Copper Extraction (%)	Bacterial oxidation leach	92
Nickel Extraction (%)	using thermotolerant bacteria	97
Cobalt Extraction (%)		97
Zinc Extraction (%)		95

5

D.2 LEACHING WITH MODERATE THERMOPHILES

In this example, the reactor used was 125mm diameter and 1.7m high. A diffuser, as described in Example A, was installed in the base of the reactor.

A sample of mixed polymetallic concentrate (designated "M2") containing a mixture of mineral sulphides was bio-oxidised to extract zinc, nickel, copper and cobalt. The concentrate contained the nickel mineral pentlandite, as well as nickel contained within the mineral pyrrhotite. Copper was predominately present in the form of chalcopyrite though chalcocite and bornite were also present. Zinc was present as sphalerite. The metal cobalt was associated with the nickel minerals and as the mineral cobalt. The concentrate was ground to a size such that 80% of the particles were less than 15 micrometers in diameter.

The ground concentrate was mixed with water to produce a slurry at 10% solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately half a litre of an inoculum slurry containing a mixture of mineral concentrate and moderately thermophilic bacteria (*Thiobacillus ferrooxidans* and *Thiobacillus thiooxidans*) was added to the slurry in the reactor. Thereafter, a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

The reactor was then placed in a heated room such that the slurry temperature was maintained at 47°C.

Air was introduced to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in suspension and to supply the oxygen requirement of the bacteria. No additional agitation of the reactor was employed. The concentrate was oxidised with metals being released into solution. The level of extraction of the metals was determined by analysing a portion of the liquid fraction of the slurry. When the reaction was

complete, the solid and the liquid phases were separated and the solution and the solids analysed.

	Conditions	M2
5	Copper Content (%)	7.3
	Nickel Content (%)	0.8
	Cobalt Content (%)	0.05
	Zinc Content (%)	0.24
10	Sulphur Oxidation (%)	77
	Copper Extraction (%)	Acid leach only 12
	Nickel Extraction (%)	10
	Cobalt Extraction (%)	13
15	Zinc Extraction (%)	24
	Copper Extraction (%)	Bacterial oxidation leach 93
	Nickel Extraction (%)	using thermotolerant bacteria 98
	Cobalt Extraction (%)	97
20	Zinc Extraction (%)	96

D.3 LEACHING WITH THERMOPHILES

In this example, the bio-oxidation reactor was of 40mm diameter and 1.0m height. A commercially available sintered polymer diffuser was installed in the base of the reactor.

A sample of mixed polymetallic concentrate (designated "M3") containing a mixture of mineral sulphides was bio-oxidised to extract zinc, nickel, copper and cobalt. The concentrate contained the nickel mineral pentlandite, as well as nickel contained within the mineral pyrrhotite. Copper was predominately present in the form of chalcopyrite though chalcocite and bornite were also present. Zinc was present as sphalerite. The metal cobalt was associated with the nickel minerals and as the mineral cobalt. The concentrate was ground to a size such that 80% of the particles were less than 15 micrometers in diameter.

The ground concentrate was mixed with water to produce a slurry at 3%

solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately 100ml of an inoculum slurry containing a mixture of mineral concentrate and thermophilic bacteria (*Sulpholobus*) was added to the slurry in the reactor. Thereafter, a mixture of
 5 nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

The reactor was then heated such that the slurry temperature was maintained at 70°C.

Air was introduced to the reactor from a standard compressor, through a
 10 flowmeter with a flow valve and thence into a pipe connected to the diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in suspension and to supply the oxygen requirement of the bacteria. No additional agitation of the reactor was employed. The concentrate was oxidised with metals
 15 being released into solution. The level of extraction of the metals was determined by analysing a portion of the liquid fraction of the slurry. When the reaction was complete, the solid and the liquid phases were separated and the solution and the solids analysed.

20

	Conditions	M2
Copper Content (%)		5.0
Nickel Content (%)		0.78
Cobalt Content (%)		0.07
25 Zinc Content (%)		0.67
Sulphur Oxidation (%)		84
Copper Extraction (%)	Bacterial oxidation leach	99
30 Nickel Extraction (%)	using thermotolerant bacteria	100
Cobalt Extraction (%)		98
Zinc Extraction (%)		97

EXAMPLE E ZINC CONCENTRATE

In this example, the bio-oxidation reactor was of 40mm diameter and 1.0m height.

A sintered polymer diffuser, as used in Example D.3, was installed in the base of the reactor.

A sample of zinc concentrate (designated "Z1") containing a mixture of mineral sulphides was treated to extract zinc. The concentrate contained the zinc as the mineral sphalerite. The sample also contained lead sulphide as galena. The concentrate was ground to a size such that 80% of the particles were less than 15 micrometers in diameter.

The ground concentrate was mixed with water to produce a slurry at 5% solids on a weight to volume basis. Sulphuric acid was added to the slurry to obtain an acidity level of pH 1.2. Approximately 100ml of an inoculum slurry containing a mixture of mineral concentrate and moderately thermophilic bacteria (*Thiobacillus ferrooxidans* and *Thiobacillus thiooxidans*) was added to the slurry in the reactor. Thereafter, a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and ammonium sulphate was added to the slurry.

The reactor was then heated such that the slurry temperature was maintained at 48°C.

Air was introduced to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the diffuser.

20 The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in suspension and to supply the oxygen requirement of the bacteria. No additional agitation of the reactor was employed. The concentrate was oxidised with zinc being released into solution. The level of extraction of the zinc was determined
25 by analysing a portion of the liquid fraction of the slurry.

Conditions		Z1
30	Zinc Content (%)	25
	Sulphur Oxidation (%)	60
	Zinc Extraction (%)	
	Bacterial oxidation leach using moderate thermophilic bacteria	97

EXAMPLE F

FERROUS TO FERRIC CONVERSION

A further test was carried out in a reactor which was 25mm diameter and 1.0m high. A sintered polymer diffuser, as used in Examples D.3 and E, was installed in the base of the reactor.

A sample of ferrous sulphate was added to the reactor and diluted with
5 water to obtain a strength of 9 g/l iron. Sulphuric acid was added to the slurry in the reactor to obtain an acidity level of pH 1.2. Extremely thermophilic bacteria (*Sulpholobus*), extracted onto a filter paper to separate them from other residual solution, were added to the slurry in the reactor. Thereafter, a mixture of nutrients comprising hydrated magnesium sulphate, potassium orthophosphate, and
10 ammonium sulphate was added to the slurry.

The reactor was then heated such that the solution temperature was maintained at 70°C.

Air was introduced to the reactor from a standard compressor, through a flowmeter with a flow valve and thence into a pipe connected to the
15 diffuser.

The air flowrate was controlled to allow a steady stream of bubbles to be emitted from the diffuser. The air was used to maintain the particles in suspension and to supply the oxygen requirement of the bacteria. No additional agitation of the reactor was employed.

20 The ferric solution was oxidised so that the ferrous ion was converted into ferric ion. The level of conversion of the ferrous ion was determined by titration with potassium dichromate.

Modifications and variations may be made to the process and reactor system of the present disclosure without departing from the scope of the
25 invention.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A process for recovering metals from materials containing them by bio-oxidation including treating, in a non-mechanically agitated reactor, a slurry containing a metal containing material with bacteria capable of promoting extraction of metals from said metal containing material; and maintaining said material in suspension and bacterial viability in the reactor by introducing an oxygen containing gas to the slurry within the reactor by aeration means.
2. The process of claim 1 wherein said gas is introduced to said slurry in bubbles of controlled size.
3. The process of claim 2 wherein said aeration means includes at least one diffuser selected from the group consisting of tubular, dome-shaped, doughnut shaped and disc shaped diffusers.
4. The process of any one of the preceding claims wherein said reactor is rakeless.
5. The process of any one of the preceding claims wherein gas introduced to the reactor further includes carbon dioxide.
6. The process of any one of the preceding claims wherein said bacterial culture includes at least one microorganism selected from the group consisting of *Thiobacillus ferrooxidans*, *Thiobacillus thiooxidans*, *Leptospirillum ferrooxidans*, *Sulphobacillus thermooxidans*, *Sulpholobus brierleyi*, *Sulpholobus BC* and *Sulpholobus acidocaldarius*.
7. The process of any one of the preceding claims wherein said metal containing material contains at least one metal of the group consisting of non-ferrous base metals, precious metals and rare earths.
8. A reactor operated in accordance with the process as claimed in any one of the preceding claims.

9. A reactor system for bio-oxidation treatment of metal containing materials including at least one rakeless reactor having a reactor volume provided with aeration means for introducing an oxygen containing gas to the reactor volume for maintaining said metal containing material in suspension and bacterial viability.
10. The reactor system of claim 9 wherein said at least one reactor is a tank or vat.
11. The reactor system of claim 9 wherein said at least one reactor includes a reservoir lined with a liquid impermeable barrier.
12. The reactor system of any of claims 10 or 11 wherein said at least one reactor has a feed end and a discharge end with a base of the reactor having a descending slope towards the discharge end.
13. The reactor system of any one of claims 9 to 12 wherein said aeration means includes at least one diffuser.
14. The reactor system of claim 13 wherein each diffuser is placed adjacent the base of the reactor.
15. The reactor system of claim 13 wherein said diffuser is a tubular, dome shaped, doughnut shaped or disc diffuser.
16. The reactor system of any one of claims 9 to 15 wherein said aeration means is located in a pipeline communicating with said at least one reactor

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C22B 3/18	A1	(11) International Publication Number: WO 00/29629 (43) International Publication Date: 25 May 2000 (25.05.00)
(21) International Application Number: PCT/AU99/00917 (22) International Filing Date: 22 October 1999 (22.10.99) (30) Priority Data: PP 7180 18 November 1998 (18.11.98) AU (71) Applicant (for all designated States except US): BACTECH (AUSTRALIA) PTY. LTD. [AU/AU]; 12 Aitken Way, Kewdale, W.A. 6105 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): RHODES, Mike [AU/AU]; 26 Woodroyd Street, Mt. Lawley, W.A. 6050 (AU). MILLER, Paul, Charles [GB/AU]; 21 Finney Crescent, Marmion, W.A. 6020 (AU). WINBY, Richard [GB/AU]; 4 Lovegrove Close, Mt. Claremont, W.A. 6010 (AU). (74) Agent: WATERMARK PATENT & TRADEMARK ATTORNEYS; Durack Centre, 4th floor, 263 Adelaide Terrace, Perth, W.A. 6000 (AU).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: BIO-OXIDATION PROCESS AND APPARATUS (57) Abstract Disclosed is a process and apparatus for conducting bio-oxidation processes for the extraction of metals from metal containing materials in which aeration means, preferably a diffuser means, is employed within a bio-oxidation reactor to maintain bacterial viability and suspension of metal containing materials by introduction of an oxygen containing gas to a non-mechanically agitated reactor.		

1/3

Fig 1.

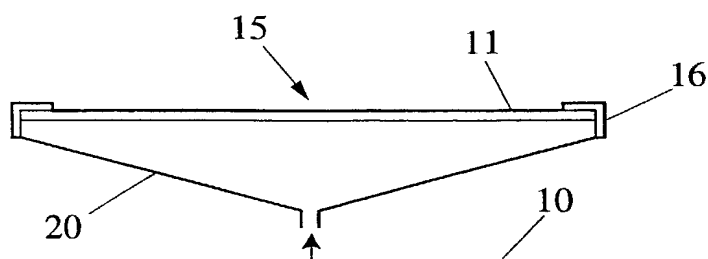


Fig 2.

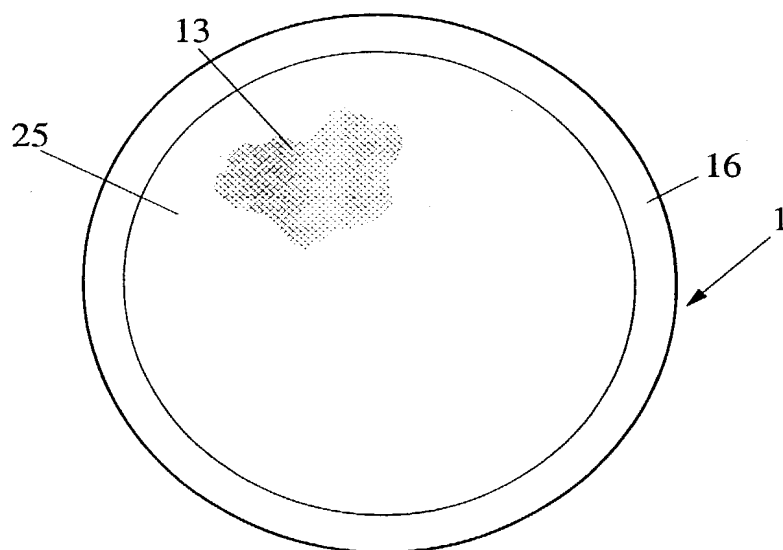


Fig 3.

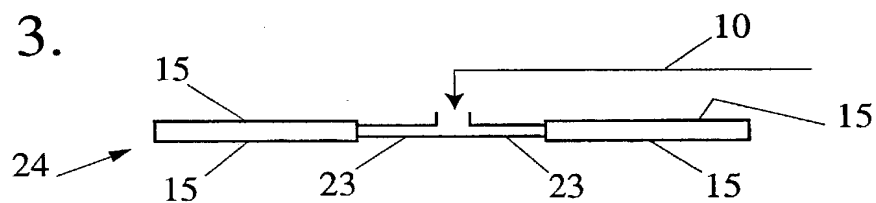


Fig 4.

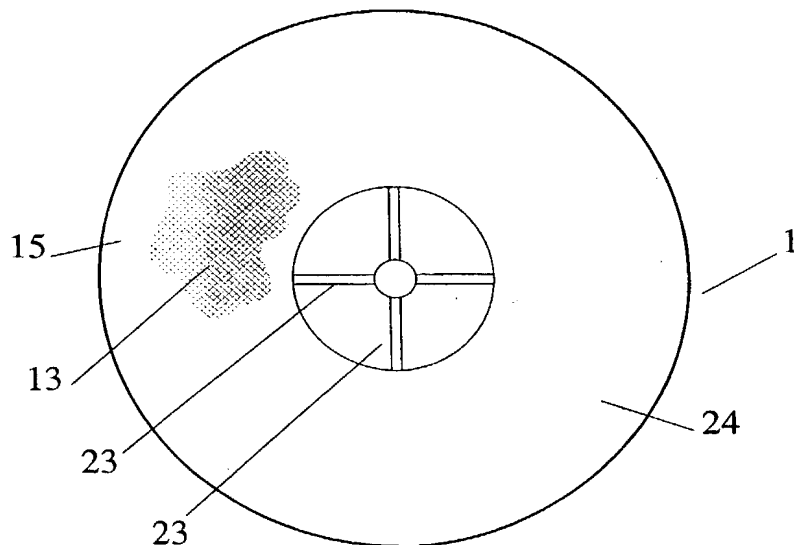


Fig 5.

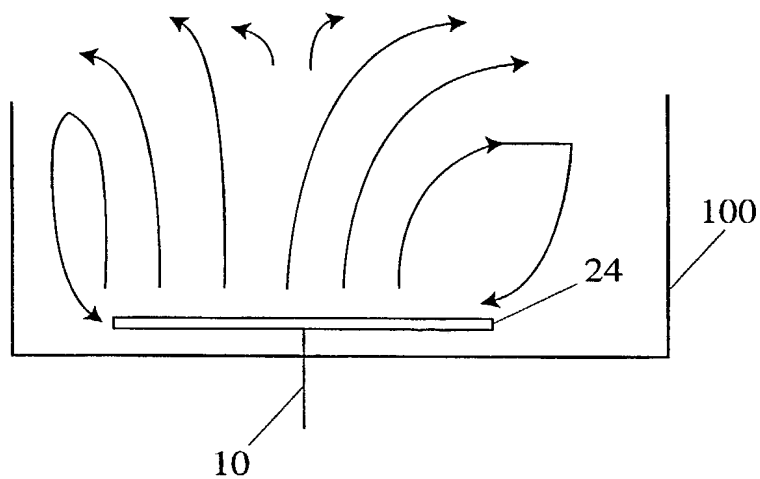


Fig 6.

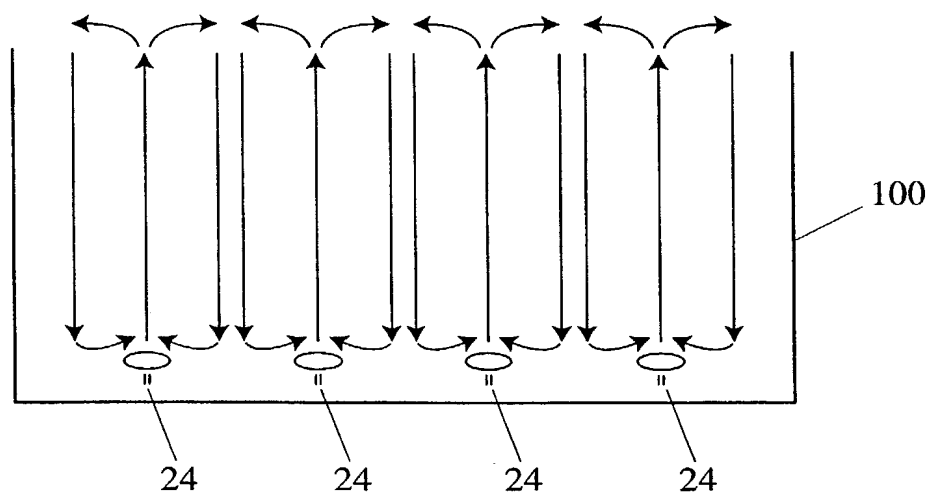


Fig 7.


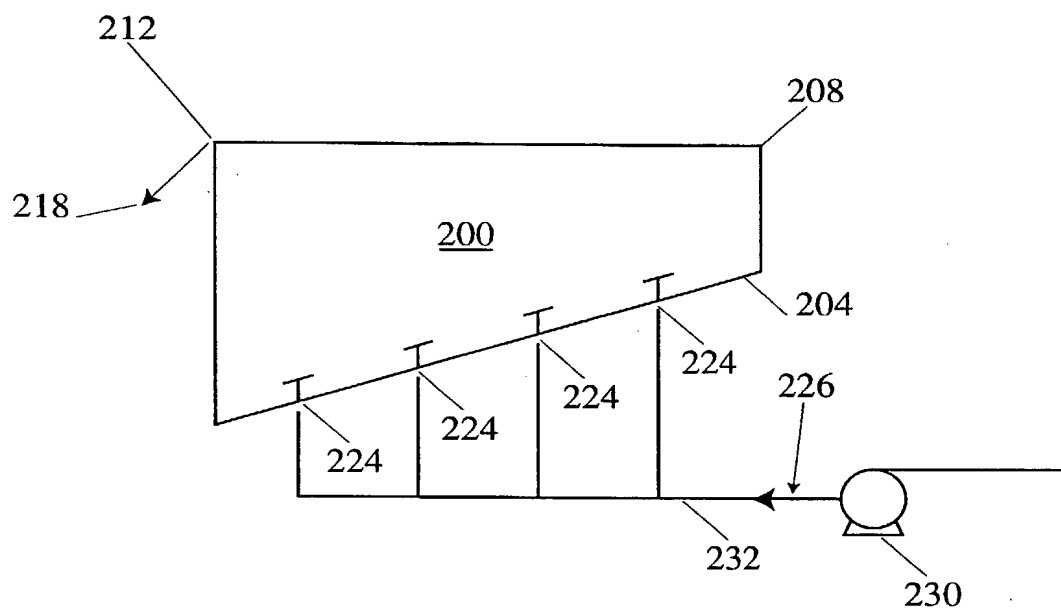


Fig 8.

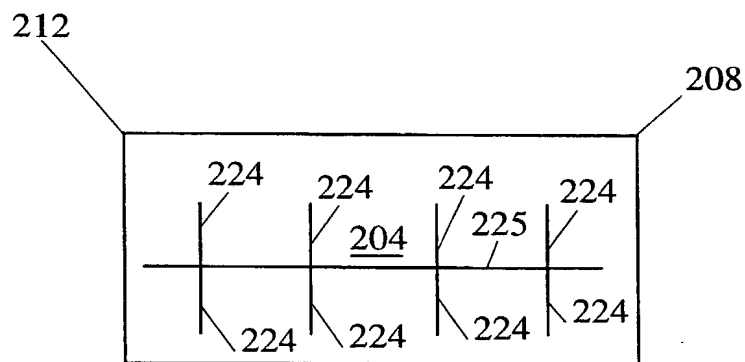

09/03/99 15:27:59 03702032

PTO/SB/01(6-95)

Approved for use through 10/31/98 OMB 0851-0032

Type a plus sign (+) inside this box → ☐

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DO/PTO Rev. 6/95	U.S. Department of Commerce Patent and Trademark Office	Attorney Docket Number	1037BP-1
DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION		First Named Inventor	RHODES, Mike
		COMPLETE IF KNOWN	
		Application Number	09/831,579
		Filing Date	
		Group Art Unit	
<input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing		Examiner Name	

As below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed for which a patent is sought on the invention entitled:

"BIO-OXIDATION PROCESS AND APPARATUS"

(Title of the invention)

the specification of which

☐ is attached hereto

OR

☒ was filed on
(MM/DD/YYYY)

22 October 1999

as United States Application Number or PCT International

Application Number

PCT/AU99/00917

and was amended on
(MM/DD/YYYY)

(If applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §385(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
PP7180	Australia	November 18, 1998	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)		
		<input type="checkbox"/>	Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Burden Hour Statement: This form is estimated to take .4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231

DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents Washington, DC 20231

FROM

(WED) 06. 26' 02 15:29/ST. 15:27/NO. 3561892295 P 4

0909 23 15 29 02 02 02

DECLARATION										ADDITIONAL INVENTOR(S) Supplemental Sheet			
Name of Additional Joint Inventor, If any:										<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Paul			Middle Initial	C.	Family Name	Miller			Suffix e.g. Jr.			
Inventor's Signature	<i>Paul Miller</i>						Date	28/6/02					
Residence City	Marmion			State	W.A.		Country	Australia		Citizenship	GB		
Post Office Address	21 Finney Crescent												
Post Office Address													
City	Marmion			State	W.A.		Zip	6020		Country	Australia		
										Applicant Authority			
Name of Additional Joint Inventor, If any:										<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Richard			Middle Initial		Family Name	Winby			Suffix e.g. Jr.			
Inventor's Signature	By: PRINT NAME:						Date						
Residence City	Mt. Claremont			State	W.A.		Country	Australia		Citizenship	GB		
Post Office Address	4 Lovegrove Close												
Post Office Address													
City	Mt. Claremont			State	W.A.		Zip	6010		Country	Australia		
										Applicant Authority			
Name of Additional Joint Inventor, If any:										<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Elizabeth			Middle Initial	A.	Family Name	Winby			Suffix e.g. Jr.			
Inventor's Signature	*EXECUTRIX FOR THE ESTATE OF RICHARD WINBY						Date						
Residence City	Mt. Claremont			State	W.A.		Country	AU		Citizenship	Australia		
Post Office Address	4 Lovegrove Close												
Post Office Address													
City	Mt. Claremont			State	W.A.		Zip	60101		Country	AU		
										Applicant Authority			
Name of Additional Joint Inventor, if any:										<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name				Middle Initial		Family Name				Suffix e.g. Jr.			
Inventor's Signature							Date						
Residence City				State			Country			Citizenship			
Post Office Address													
Post Office Address													
City				State			Zip			Country			
										Applicant Authority			

☐ Further applicants and/or (further) inventors are indicated on another continuation sheet

Form PCT/RO/101 (continuation sheet)(July 1998)(form duplicated by Sheridan Ross P.C.-jmm)

See Notes to the request form

Type a plus sign (+) inside this box ☐

(WED) 06. 26' 02 15:29/ST. 15:27/NO. 3561892295 P 5

DECLARATION

ADDITIONAL and/or AGENT INFORMATION
Supplemental Sheet

Name	Registration Number	Name	Registration Number
CARDWELL, DANA HARTJE	<u>40,636</u>		
DALLAS-PEDRETTI, ANGELA	<u>42,460</u>		
LIEB, BENJAMIN B.	<u>42,801</u>		
KNEPPER, BRADLEY M.	<u>44,169</u>		
TRUDELL, MIRIAM DRICKMAN	<u>42,499</u>		
DUPRAY, DENNIS J.	<u>46,299</u>		
PETERSEN, Todd M.	<u>45,580</u>		
WINTERTON, Kenneth C.	<u>48,040</u>		
TRAYER, Robert D.	<u>47,999</u>		
JOHNSON, Brent P.	<u>38,031</u>		
YASKANIN, Mark L.	<u>45,246</u>		